


## PASSO A PASSO ZOIPER – VERSÃO ATUAL

Faça download do aplicativo pelo link abaixo:

<https://www.zoiper.com/en/voip-softphone/download/current>


Após instalação, abra o aplicativo.

Clique em **Continue as a Free user** ( utilização gratuita).

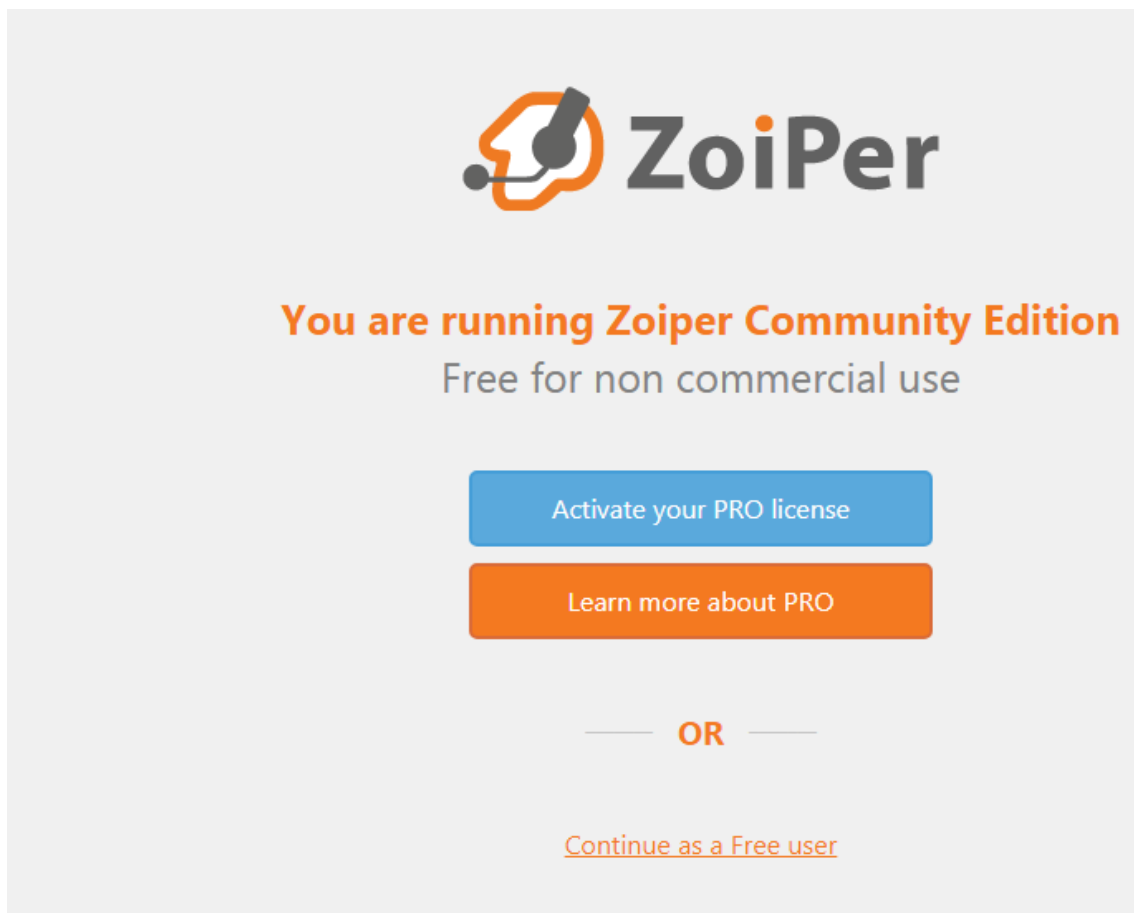

Coloque o **login, servidor e senha** informado pela Fonetalk.

Clique em **login**.

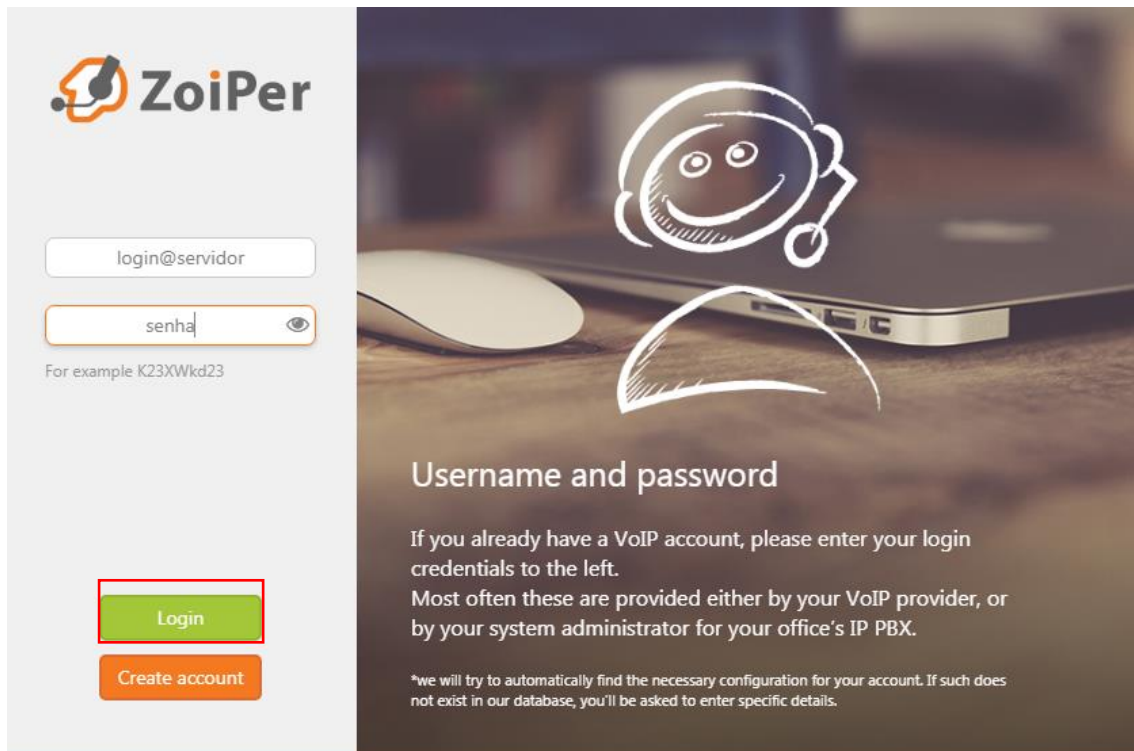

The image shows the ZoiPer login interface. On the left, there is a form with two input fields: the first contains 'login@servidor' and the second contains 'senha' with an eye icon. Below the password field is the text 'For example K23XWkd23'. At the bottom of the form are two buttons: a green 'Login' button and an orange 'Create account' button. The 'Login' button is highlighted with a red rectangular box. On the right, there is a background image of a laptop with a white line-art character of a person wearing a headset. Below the image, the text reads: 'Username and password', 'If you already have a VoIP account, please enter your login credentials to the left.', 'Most often these are provided either by your VoIP provider, or by your system administrator for your office's IP PBX.', and a small asterisked note: '\*we will try to automatically find the necessary configuration for your account. If such does not exist in our database, you'll be asked to enter specific details.'

Exemplo:




This image is identical to the one above, showing the ZoiPer login page. The example username in the first input field is '1234@sip.2voip.com.br'. The 'Login' button is no longer highlighted with a red box.

Confirme o **servidor**.

Fill in your hostname and select your provider from the list

This could also be called 'Domain', 'SIP server', 'Registrar' or 'SIP Proxy'. For example 'sip.example.com' or '123.21.123.32:5060'




### Hostname

This could also be called 'Domain', 'SIP server', 'Registrar' or 'SIP Proxy'. For example 'sip.example.com' or '123.21.123.32:5060'. You can also just search for the name of your provider, maybe we know the settings. If not – you'll be able to set it up manually.

Clique em **Skip** (pular opção do outbound proxy)

**Optional**  
Authentication and Outbound proxy

\*If your VoIP provider or office PBX does not require these additional settings click '**Skip**' to continue

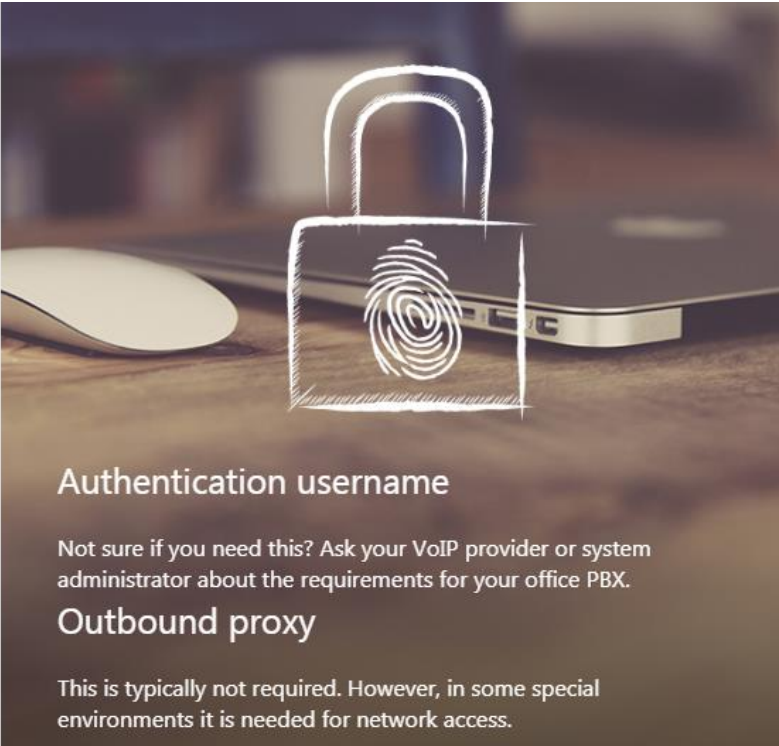

### Authentication username

Not sure if you need this? Ask your VoIP provider or system administrator about the requirements for your office PBX.


### Outbound proxy

This is typically not required. However, in some special environments it is needed for network access.

Aguarde a configuração e clique em **Next**

Please wait, we are testing possible configurations

<input type="radio"/>	SIP TLS	PRO
<input type="radio"/>	SIP TCP	Not found
<input checked="" type="radio"/>	<b>SIP UDP</b>	Found
<input type="radio"/>	IAX UDP	Not found

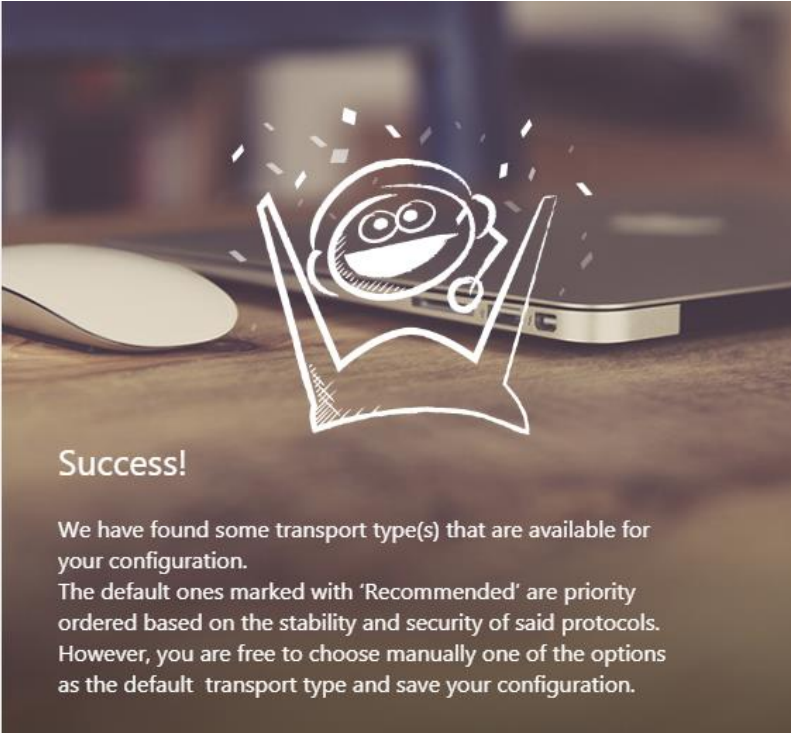

**Success!**

We have found some transport type(s) that are available for your configuration. The default ones marked with 'Recommended' are priority ordered based on the stability and security of said protocols. However, you are free to choose manually one of the options as the default transport type and save your configuration.

## Conta configurada

✔ 62270@sip.2voip.com.br 



Contacts

Recent

All Online Favorites 

Click here to add a  
new contact



## Clique no teclado

✔ 62270@sip.2voip.com.br 



1	2 ABC	3 DEF
4 GHI	5 JKL	6 MNO
7 PQRS	8 TUV	9 WXYZ
*	0 +	#

**Dial**

Qualquer dúvida entre em contato pelo 0800 878 8585 ou (62) 9 9999-0278 (Whatsapp).